

EUROVAC II – 4.6HP WELDING PORTABLE



POR-P46-B02F0005

Technical Data:

Specifications	
Voltage	1 Phase 60Hz 220/120
Current Draw	13 amps
Power	1300 watts
Waterlift, max.	137 inches H2O
Airflow, max.	224 cfm
Collection Canister	5 gallons
Weight	160 lbs.
Sound Level @ 10'	72 dB(A)
Filter Area	200 ft ²
Filter Efficiency	99.93% @ 3 microns
HEPA (optional)	99.97% @ 0.3 microns
Height	49 inches
Width	26 inches
Depth	26 inches

- Unit comes standard with two 2.3HP brush motors for 4000hrs of intermittent duty
- Superior Filtration: Cyclonic filter separator & final nanofiber filter (200 ft.² filter media) effectively captures 99.93% of particles at 3 microns or larger
- Electrical: 1 Phase 60 Hertz 220/120 (4 wire: 2 Hot, 1 Neutral & 1 Ground). Nema #L1420P plug provided. Also available with two 115/1/60 - 13 amp (requires a 15-amp circuit)
- Includes one 2"x15' anti-static vacuum hose & blue hose/tool hanger
- Optional upgrade to HEPA filtration available

BEFORE




AFTER



Applications:



Eurovac offers a complete line of source capture welding guns and portable fume attachments:

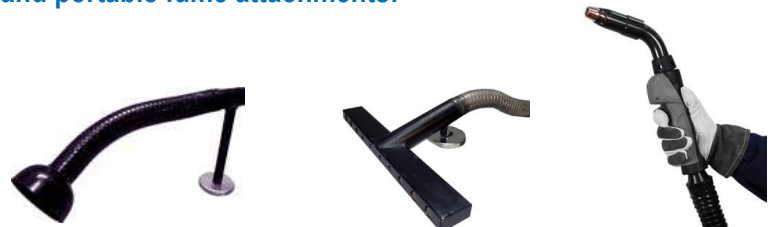

For more information, contact Eurovac:

CANADA and USA
Toll-Free 800-265-3878 / Fax 416-744-8079
info@eurovac.com

44 Milvan Dr., North York, ON M9L 1Z3
5927 Center Rd, Unit 3, Valley City, OH 44039